


# SERIES™ 70mm

## ENDURACOLOR™



**BLACK GRANITE**  
4 x 8, 8 x 8, 8 x 16

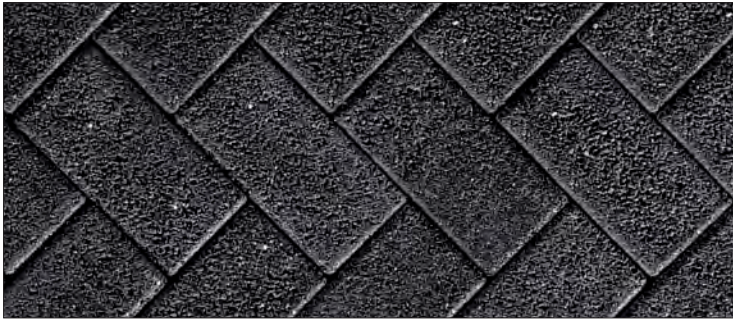

**GLACIER**  
8 x 8, 8 x 16

46  
SRI

**MOUNTAIN MIST**  
8 x 8, 8 x 16

29  
SRI

### VISUAL APPEARANCE

Series' specialized manufacturing process creates a striking visual effect with the surface granite particles and also results in an extremely durable paver.

### FINISH

The aggregate surface is pressed into the stone surface simultaneously with the body of the stone in a single process and not in layers. The resulting surface becomes an integral part of the paver itself, giving you long-term wear and structural performance.

### PRODUCT SPECIFICATIONS



4 x 8 x 2 3/4"  
100 x 200 x 70mm  
*Black Granite only*



8 x 8 x 2 3/4"  
200 x 200 x 70mm




8 x 16 x 2 3/4"  
200 x 400 x 70mm

### EDGE DETAILS




ROUNDED EDGE


### LAYING PATTERNS




**SERIES A**  
67% 8 x 16,  
33% 8 x 8



**SERIES B**  
67% 8 x 16,  
33% 8 x 8



**SERIES C**  
100% 4 x 8



**SERIES D**  
100% 4 x 8

\*Colour selection should be chosen from actual samples.

TECHNICAL INFORMATION

ASTM C 936 Standard Specifications for Solid Concrete Interlocking Paving Units



Conforms to:

- C140 for Absorption 5% avg - 7% max
- Compressive Strength > 7,200 PSI avg.
- C67 for Freeze-thaw Durability
- C418 for Abrasion Durability
- Dimensional Accuracy +/- 3mm

Test results available upon request

Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines

SOLAR REFLECTIVE INDEX (SRI) TESTING DETAILS

Product	Solar Reflectance	SRI
Glacier	0.41	46 
Mountain Mist	0.28	29 

TECHNICAL ADVANTAGES

ENDURACOLOR™

Refined surface and long-lasting colour

DRIVE FRIENDLY

Can handle vehicular loads  
Ask about our base stabilization system

SERIES FINISH

Granite, Quartz and Marble surface materials

LEED INFORMATION

Materials & Resources: LEED V4:

- Building Product Disclosure and Optimization
- Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • 1 point
- Sourcing of Raw Materials - Leadership Extraction Practices • 1 point
- Material Ingredient Reporting - Material Ingredient Reporting • 1 point
- Material Ingredient Reporting - Material Ingredient Optimization • 1 point
- Environmental Product Declaration • 1 point

PRODUCT DATA

Stones & Bundling	Unit Thickness	SqFt Per					Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per		Lbs Per	
		Bundle	Layer	Section	Stone	Layers	Sections	Unit	Section	Bundle	Unit	Section	Bundle	SqFt	Bundle	Layer	Bundle	
<b>Georgetown Manufacturing</b>																		
Series 70mm																		
4" x 8"	2¾" (70mm)	94.40	11.80		0.22	8	-	0.33	-	141.7	0.67	-	283.30	4.57	432	377	3,019	
8" x 16"	2¾" (70mm)	82.67	10.33		0.86	8	-	0.66	-	63.0	1.31	-	126.00	1.16	96	343	2,746	
8" x 8"	2¾" (70mm)	82.67	10.33		0.46	8	-	0.66	-	126.0	0.66	-	126.00	2.32	192	331	2,647	

Notes: Custom colors and finishes available. Minimum quantities apply. Sold on a refundable skid. See terms and conditions of sale. All measurements are nominal. **Important: A urethane rubber paver mat must be used to prevent scuffing. Polymeric Sand advisory.** For more information, samples or custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.

APPLICATIONS



Pedestrian



Residential Vehicular



Commercial Vehicular (4 x 8 x 2 ¾" & 8 x 8 x 2 ¾" only)



Borders and Accents



Roof Decks



\*Wall pairing suggestion- U-CARA® Wall

RECOMMENDED SANDS

RECOMMENDED SEALER



**Romex: Rompox® Fugensand**

Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- Manufactured from natural, raw materials
- Quick application
- Self-repairing properties
- Suitable for all load classes
- No cement haze/residue due to natural polymer binder
- Three colours: Natural, Stone Grey and Basalt

Coverage:

Colour	3mm Joints
Neutral, Stone Grey, Basalt <i>1 L / 5 gal</i>	110 sqft / 55 lb bag 750 sqft / 5 gal drum

**Romex Rompox® D7000 Joint Strengthener & Surface Sealer**

Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- All-in-one strengthener & sealer
- Eco-Friendly
- Protects against dirt, oil, corrosion from climate exposure, de-icing salts
- Protects against weed growth and wash outs

Coverage:

Colour	3mm Joints
Neutral, Stone Grey, Basalt <i>55 lb bag / 1 kg can</i>	110 sqft / 55 lb bag 750 sqft / 5 gal drum

**Alliance Gator G2 MAXX Sand**

- Rain safe after 15 minutes (24hr no rain if concrete overlay)
- Sets above 32° F/ 0° C - may vary depending on weather, drainage, bedding materials and installation
- Dust free and haze free
- Requires only one watering
- Four colours: Beige, Grey, Black and Ivory

Coverage:

Colour	Narrow Joints	Wide Joints
Beige, Grey, Ivory <i>50 lb bag</i>	65-85 sqft	22-42 sqft
Black <i>50 lb bag</i>	58-76 sqft	20-38 sqft

**Alliance Gator Natural Look Sealer**

- Water-based
- Zero gloss finish
- Multi purpose
- Rain safe after 24 hours

Coverage:

Size	Area
3.78 L / 1 U.S. gal.	175 sqft
18.9 L / 5.28 U.S. gal.	875 sqft

\*Please refer to Sands & Sealers on pages 190-202 for more detailed information.

Unsure of bonded vs. unbonded product recommendations? Please contact your Unilock Territory Manager for more information.