

ARTLINE™

ENDURACOLOR™




Special Order only. Minimum qty's apply



FOSSIL **NEW**



GRANITE MIST

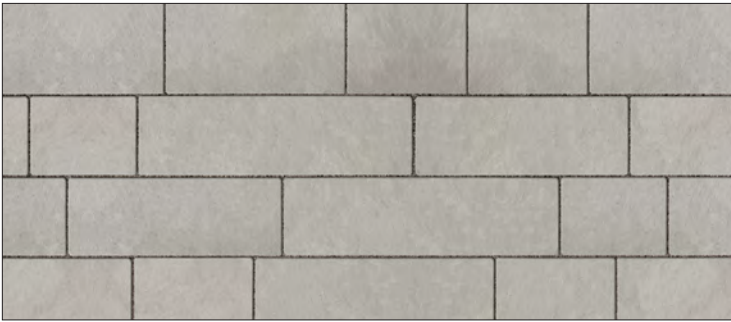

STERLING **NEW**


VISUAL APPEARANCE

The long, clean lines of Artline™ reflect an emerging trend to modern, linear outdoor designs. The product is sold in a random bundle of seven different rectangular shapes in two widths and varying lengths.

FINISH

Artline™ uses EnduraColor™ technology for a refined surface with long lasting colour and some even have EasyClean™, an integral surface protection from stains. These finishes can be used separately for a cohesive look, or combined together to create colour and textural interest.

PRODUCT SPECIFICATIONS

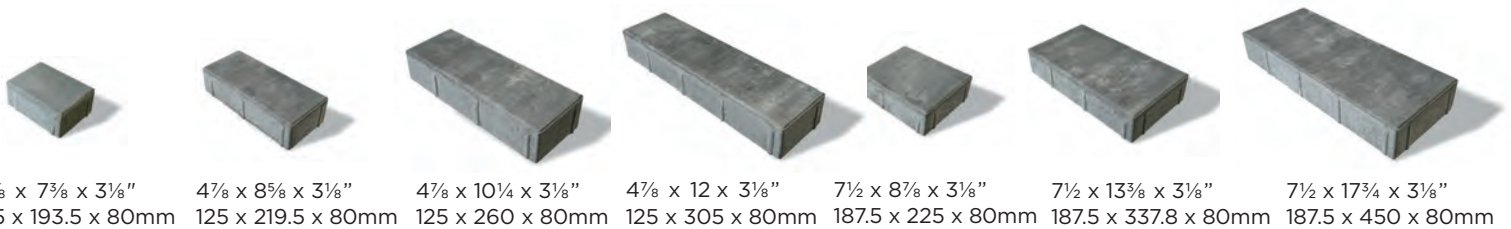

$4\frac{7}{8} \times 7\frac{3}{8} \times 3\frac{1}{8}$ "
125 x 193.5 x 80mm

$4\frac{7}{8} \times 8\frac{5}{8} \times 3\frac{1}{8}$ "
125 x 219.5 x 80mm

$4\frac{7}{8} \times 10\frac{1}{4} \times 3\frac{1}{8}$ "
125 x 260 x 80mm

$4\frac{7}{8} \times 12 \times 3\frac{1}{8}$ "
125 x 305 x 80mm

$7\frac{1}{2} \times 8\frac{7}{8} \times 3\frac{1}{8}$ "
187.5 x 225 x 80mm

$7\frac{1}{2} \times 13\frac{3}{8} \times 3\frac{1}{8}$ "
187.5 x 337.8 x 80mm

$7\frac{1}{2} \times 17\frac{3}{4} \times 3\frac{1}{8}$ "
187.5 x 450 x 80mm


7 UNIT RANDOM BUNDLE

EDGE DETAILS



MICRO BEVEL

BUNDLE CONFIGURATION



LAYING PATTERNS



*Colour selection should be chosen from actual samples.

TECHNICAL INFORMATION

ASTM C 936 Standard Specifications for Solid Concrete Interlocking Paving Units

Conforms to:

- C140 for Absorption 5% avg - 7% max
- C140 for Compressive Strength > 7,200 PSI avg.
- C1645 for Freeze-thaw Durability
- C418 for Abrasion Durability
- Dimensional Accuracy **+/- 3 mm**

Test results available upon request

Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines

LEED INFORMATION

Materials & Resources: LEED V4:

- Building Product Disclosure and Optimization
- Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • **1 point**
- Sourcing of Raw Materials - Leadership Extraction Practices • **1 point**
- Material Ingredient Reporting - Material Ingredient Reporting • **1 point**
- Material Ingredient Reporting - Material Ingredient Optimization • **1 point**
- Environmental Product Declaration • **1 point**

TECHNICAL ADVANTAGES

ENDURACOLOR™

Refined surface and long-lasting colour

DRIVE FRIENDLY

Can handle vehicular loads
Ask about our base stabilization system

PRODUCT DATA

Stones & Bundling	Unit		SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per		
	Thickness		Bundle	Layer	Section	Stone	Layers	Sections	Unit	Section	Bundle	Unit	Section	Bundle	SqFt	Section	Bundle	Layer	Section	Bundle
Pickering Manufacturing / Granite Fusion stocked in Ayr																				
Random Bundle			81.60	11.66	-	1.00	7	-	-	-	-	-	-	-	2.4	-	196	426.61	-	2,986.27
Large 12.5	3 1/8" (80mm)	-	-	-	-	0.35	-	-	-	-	-	-	-	-	2.20	-	32	-	-	-
Large 18.75	3 1/8" (80mm)	-	-	-	-	0.91	-	-	-	-	-	-	-	-	1.10	-	16	-	-	-
Medium 12.5	3 1/8" (80mm)	-	-	-	-	0.29	-	-	-	-	-	-	-	-	2.83	-	32	-	-	-
Medium 18.75	3 1/8" (80mm)	-	-	-	-	0.68	-	-	-	-	-	-	-	-	1.47	-	16	-	-	-
Small 12.5	3 1/8" (80mm)	-	-	-	-	0.23	-	-	-	-	-	-	-	-	4.40	-	32	-	-	-
Small 18.75	3 1/8" (80mm)	-	-	-	-	0.45	-	-	-	-	-	-	-	-	2.20	-	32	-	-	-
X-Large 12.5	3 1/8" (80mm)	-	-	-	-	0.41	-	-	-	-	-	-	-	-	1.65	-	32	-	-	-
Random Bundle	4" (100mm)	58.25	11.65	-	-	-	-	-	-	-	-	-	-	-	-	-	533.16	-	2,665.81	

Notes: Product sold in full bundles only on a refundable skid. All measurements are nominal.

Important: A urethane rubber paver mat must be used to prevent scuffing. For more information, samples or custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.

APPLICATIONS



Pedestrian



Residential Vehicular



Roof Deck

RECOMMENDED SANDS

RECOMMENDED SEALER



+



Romex: Rompox® Fugensand

Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- | Manufactured from natural, raw materials
- | Allows for efficient stormwater management and more durable paver joint
- | Quick application
- | Self-repairing properties
- | Suitable for all load classes
- | No cement haze/residue due to natural polymer binders

Coverage:

Colour	3mm Joints
Neutral, Stone Grey, Basalt <i>1 L / 5 gal</i>	50-150 sqft / 55 lb bag

Romex: Rompox® D7000 Joint Strengthener & Surface Sealer

Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- | All-in-one strengthener & sealer
- | Eco-Friendly
- | Protects against dirt, oil, corrosion from climate exposure, de-icing salts
- | Protects against weed growth and wash outs
- | Allows for light surface pressure washing once cured

Coverage:

Colour	3-4mm Joints
Neutral, Stone Grey, Basalt <i>55 lb bag / 1 kg can</i>	50-150 sqft / 55 lb mix

Alliance - Gator G2 MAXX Sand

- | Rain safe after 15 minutes (24hr no rain if concrete overlay)
- | Sets above 32° F/ 0° C - may vary depending on weather, drainage, bedding materials and installation
- | Dust free and haze free
- | Requires only one watering
- | Four colours: Beige, Grey, Black and Ivory

Colour	Narrow Joints	Wide Joints
Beige, Grey, Ivory <i>50 lb bag</i>	65-85 sqft	22-42 sqft
Black <i>50 lb bag</i>	58-76 sqft	20-38 sqft

Alliance - Gator Natural Look Sealer

- | Water-based
- | Zero gloss finish
- | Multi purpose
- | Rain safe after 24 hours

Size	Area
3.78 L / 1 U.S. gal.	175 sqft
18.9 L. / 5.28 U.S. gal.	875 sqft

*Please refer to Sands & Sealers on pages 190-202 for more detailed information.

Unsure of bonded vs. unbonded product recommendations? Please contact your Unilock Territory Manager for more information.