


Metrik Slab




Do not use vibrating plate


1 bag of sand covers approx. 55 ft²

Pedestrian - Designed to withstand pedestrian traffic

Metrik Slab

	DIMENSIONS (MM)	DIMENSIONS (IN)	CODES	COLOURS	TYPICAL ROW																																								
	60 x 70 x 280	2 3/8 x 2 3/4 x 11	PRESTIGE COLOURS		<table border="1"> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>																																								
Weight/unit	2.7 kg	5.96 lb	10502883	Range Bayona Grey																																									
Surface/unit	0.02 m ²	0.21 ft ²	10502884	Blizzard																																									
Area/layer	0.92 m ²	9.95 ft ²	10502882	Rockland Black																																									
Area/cube	11.09 m²	12 Rows 119.40 ft²	Sold in full cubes only																																										
Qty/cube	576 units	576 units	Can be double stacked																																										
Weight/cube	1558 kg	3434 lb	Production location St-Eustache																																										

LAYING PATTERNS

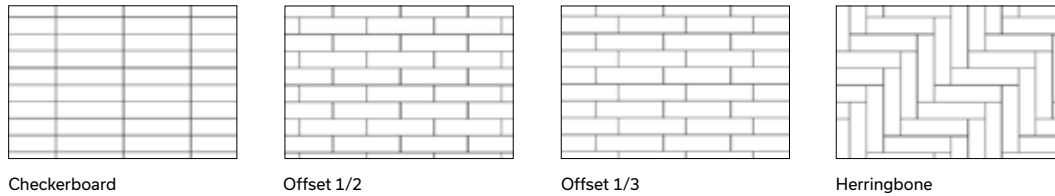

Checkerboard

Offset 1/2

Offset 1/3

Herringbone

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Metrik Slab	CSA A231.1	±4.5 MPa	N/A	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

* Concave or convex warpage in one dimension: up to and including 450 mm: 2.0 mm / over 450 mm: 3.00 mm