


# WESTPORT<sup>®</sup> SMOOTH

NEW FOR 2023

## CLASSIC

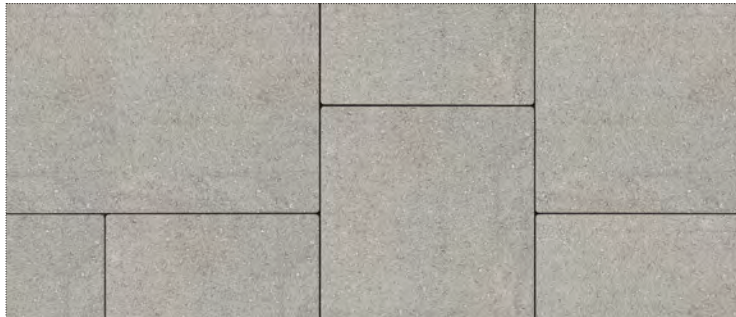

DUSK



SAFARI



CHARCOAL

Available in 5 x 10 only

### VISUAL APPEARANCE

Smooth with straight edge.

### FINISH

Factory-sealed and smooth.

### PRODUCT SPECIFICATIONS



LARGE RECTANGLE  
10 x 15 x 2<sup>3</sup>/<sub>4</sub>"  
250 x 375 x 70mm



SQUARE  
10 x 10 x 2<sup>3</sup>/<sub>4</sub>"  
250 x 250 x 70mm



SMALL RECTANGLE  
5 x 10 x 2<sup>3</sup>/<sub>4</sub>"  
125 x 250 x 70mm



SMALL RECTANGLE  
5 x 10 x 2<sup>3</sup>/<sub>4</sub>"  
125 x 250 x 70mm


3 UNIT RANDOM BUNDLE

### SMALL RECTANGLE



SMALL RECTANGLE  
5 x 10 x 2<sup>3</sup>/<sub>4</sub>"  
125 x 250 x 70mm

### EDGE DETAILS



MICRO-BEVEL  
1.5mm

### BUNDLE CONFIGURATION

WESTPORT SMOOTH  
RANDOM BUNDLE




### BUNDLE CONFIGURATION

WESTPORT SMOOTH  
SM REC BUNDLE



### LAYING PATTERNS

WESTPORT SMOOTH  
RANDOM BUNDLE A



**TECHNICAL INFORMATION**

**ASTM C936 Standard Specifications for Solid Concrete Interlocking Paving Units**

Conforms to:

- C140 for Absorption 5% avg - 7% max
- Compressive Strength > 7,200 PSI avg.
- C67 for Freeze-thaw Durability
- C418 for Abrasion Durability
- Dimensional Accuracy +/- 3 mm

Test results available upon request

**Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines**

**LEED INFORMATION**

**Rainwater Management: LEED V4:**

- Up to three points can be achieved for retaining rainwater onsite based on the percentile kept
- 85% (zero lot line projects only) - 3 points, 95% - 2 points and 98% - 3 points. (All except Healthcare - subtract one point) See LEED v4 for more specific project/site details.

**Materials and Resources: LEED V4:**

- Building Product Disclosure and Optimization
- Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • 1 point
- Sourcing of Raw Materials - Leadership Extraction Practices • 1 point
- Material Ingredient Reporting - Material Ingredient Reporting • 1 point
- Material Ingredient Reporting - Material Ingredient Optimization • 1 point
- Environmental Product Declaration • 1 point

**TECHNICAL ADVANTAGES**

**CLASSIC**

Budget-friendly. Utilizes a traditional product mix of large and small aggregates that's consistent from top to bottom with colour mixed throughout.

**ClassicCoat**

Factory sealed to protect surface texture and colour

**PRODUCT DATA**

Stones & Bundling	Unit	SqFt Per			Per Bundle	Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per		
	Thickness	Bundle	Layer	Stone	Layers	Unit	Layer	Bundle	Unit	Layer	Bundle	SqFt	Section	Bundle	Layer	Section	Bundle
<b>Ayr Manufacturing</b>																	
Random Bundle		94.19	11.77	0.59	8	-	-	-	-	14.35	114.8	-	-	160	384.48	-	3,075.83
Large Rectangle	2¾" (70mm)	-	-	1.04	-	-	-	-	1.25	-	-	-	-	-	-	-	-
Square	2¾" (70mm)	-	-	0.69	-	-	-	-	0.83	-	-	-	-	-	-	-	-
Small Rectangle	2¾" (70mm)	-	-	0.38	-	-	-	-	0.42	-	-	-	-	-	-	-	-
Small Rectangle	2¾" (70mm)	94.19	11.77	0.38	8				0.83	14.35	233.33	2.97		280	384.48		3,016.91

Notes: Acceptable for driveways and walkways. Product sold in full bundles only on a refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing.** All measurements are nominal. For more information, samples or custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.

**APPLICATIONS**



Pedestrian



Residential Vehicular



\*Wall pairing suggestion- Lineo™ Dimensional Stone\*

**RECOMMENDED SANDS**

**RECOMMENDED SEALER**



**Romex: Rompox® Fugensand**  
Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- Manufactured from natural, raw materials
- Quick application
- Self-repairing properties
- Suitable for all load classes
- No cement haze/residue due to natural polymer binder
- Three colours: Natural, Stone Grey and Basalt

**Romex: Rompox® D7000 Joint Strengthener & Surface Sealer**  
Pedestrian, Vehicular and Heavy Duty Vehicular Applications

- All-in-one strengthener & sealer
- Eco-Friendly
- Protects against dirt, oil, corrosion from climate exposure, de-icing salts
- Protects against weed growth and wash outs

**Alliance Gator G2 Super Sand**

- Rain safe after 1 hour (no concrete overlays)
- Sets above 32° F/ 0° C - may vary depending on weather, drainage, bedding materials and installation
- Can be used for joints up to a max of 2"
- Dust free and haze free
- Requires only one watering
- Two colours: Beige, Slate Grey

**Alliance Gator Hybrid Low Gloss + Colour Enhancer**

- Water-based
- Low gloss finish
- Vibrant Colour Enhancer
- Rain safe after 24 hours

**Coverage:**

Colour	3mm Joints
Neutral, Stone Grey, Basalt 1 L / 5 gal	110 sqft / 55 lb bag 750 sqft / 5 gal drum

**Coverage:**

Colour	3mm Joints
Neutral, Stone Grey, Basalt 55 lb bag / 1 kg can	110 sqft / 55 lb bag 750 sqft / 5 gal drum

**Coverage:**

Colour	Narrow Joints	Wide Joints
Beige, Slate Grey 50 lb bag	65-85 sqft	22-42 sqft

**Coverage:**

Size	Area
3.78 L / 1 U.S. gal.	200 sqft
18.9 L / 5.28 U.S. gal.	1,000 sqft

\*Please refer to Sands & Sealers on pages 190-202 for more detailed information.

Unsure of bonded vs. unbonded product recommendations? Please contact your Unilock Territory Manager for more information.