



## TRAVERTINA RAW

**DESCRIPTION:** Double-sided wall **TEXTURE:** Brushed Travertine

### PALLET OVERVIEW



### COMPATIBLE CAPS

See page 140 for product compatibility.

### NOTES

The dimensional tolerance for Stonedge wet cast retaining wall units is:  $\pm \frac{3}{16}$ " (5 mm) for height and  $\pm \frac{1}{2}$ " (13 mm) for length and width. During the installation, the level between adjacent wall units will vary (usually more than for a dry cast wall unit) in order to obtain a more realistic appearance of a natural stone wall.

See page 135 to 156 for more technical information.

Specifications per pallet	Imperial	Metric
Cubing	<b>31.75 ft<sup>2</sup>/pal</b>	2.95 m <sup>2</sup> /pal
	63.5 lin. ft/pal	19.36 lin. m/pal
Approx. Weight	2 902 lbs	1 316 kg
Number of rows	4	
Coverage per units	0.66 ft <sup>2</sup> /unit	0.06 m <sup>2</sup> /unit
Coverage per row	7.94 ft <sup>2</sup> /row	0.74 m <sup>2</sup> /row
Linear coverage per row	15.88 lin. ft/row	4.84 lin. m/row




A




Unit dimensions	in	mm	Units/pallet
Height	6	152	48 units
Depth	7 $\frac{15}{16}$	202	
Length	15 $\frac{5}{8}$	403	


Rock Garden Brown



Ivory



Riviera





# TRAVERTINA RAW

**DESCRIPTION:** Corners and pillars **TEXTURE:** Brushed Travertine

## PALLET OVERVIEW



## COMPATIBLE CAPS

See page 140 for product compatibility.

## NOTES

The dimensional tolerance for Stonedge wet cast retaining wall units is:  $\pm \frac{3}{16}$ " (5 mm) for height and  $\pm \frac{1}{2}$ " (13 mm) for length and width. During the installation, the level between adjacent wall units will vary (usually more than for a dry cast wall unit) in order to obtain a more realistic appearance of a natural stone wall.

See page 135 to 156 for more technical information.

Specifications per pallet	Imperial	Metric
Cubing	<b>24 units</b>	24 units
Approx. Weight	1 576 lbs	715 kg
Number of rows	2	
Pillar height	36 in	914 mm




A




Unit dimensions	in	mm	Units/pallet
Height	6	152	24 units
Depth	7 $\frac{15}{16}$	202	
Length	15 $\frac{7}{8}$	403	


Rock Garden Brown



Ivory




Riviera



# INSTALLATION GUIDE


## FREESTANDING WALLS - TRAVERTINA RAW

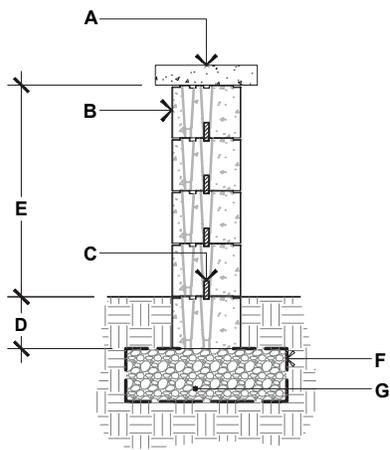


### TRAVERTINA RAW

- A.** TECO-BLOC CAP UNIT, SECURED TO UNIT BELOW WITH FLEXLOCK ADHESIVE
- B.** TRAVERTINA RAW DOUBLE-SIDED WALL UNIT SECURE EACH ROW WITH FLEXLOCK ADHESIVE
- C.** CONNECTOR
- D.** EMBEDMENT DEPTH, 6" (150 mm) MIN.
- E.** 24" (612 mm) MAX.
- F.** GEOTEXTILE
- G.** COMPACTED GRANULAR LEVELING PAD, 6" (150 mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

## 90° CORNER OF A DOUBLE-SIDED WALL

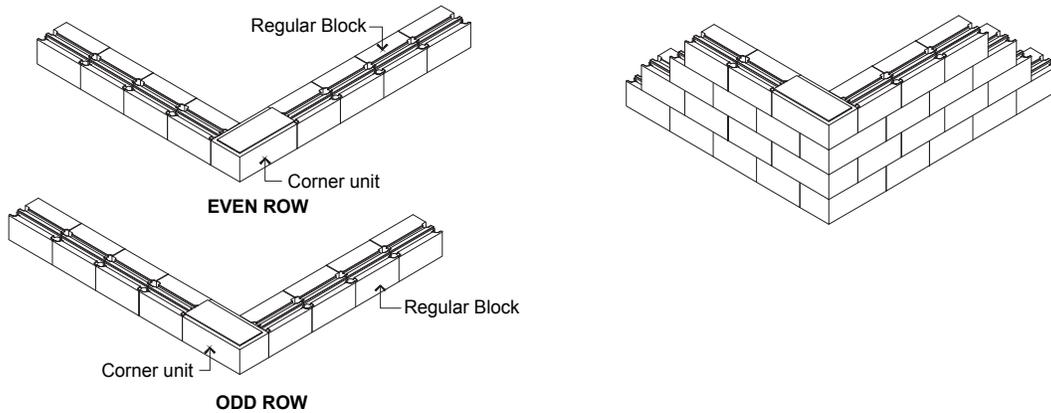

## DOUBLE-SIDED WALL - END OF A STRAIGHT WALL

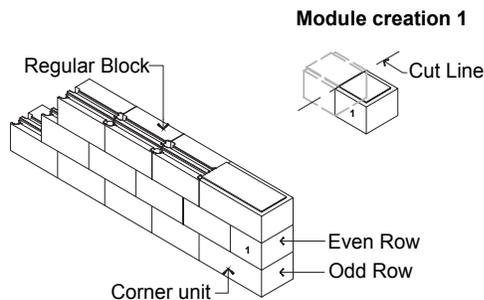


### GENERAL NOTES

1. Alternate odd and even rows.
2. Stagger joints from one row to the next.
3. Glue all modules at each row with Flexlock adhesive.

# INSTALLATION GUIDE

## PILLARS - TRAVERTINA RAW

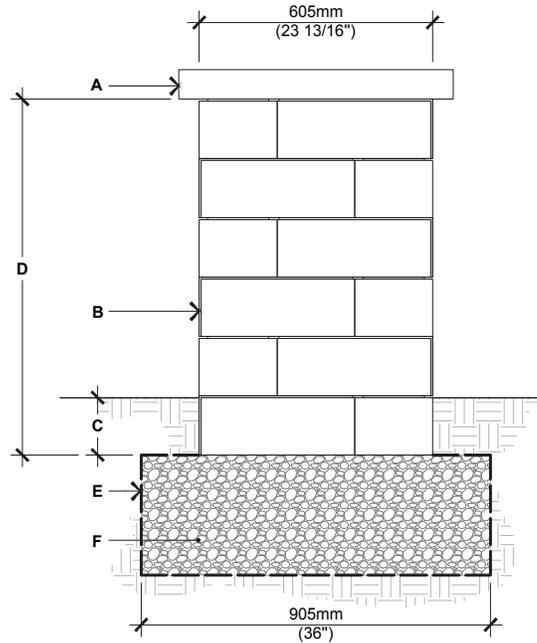


### ○ TRAVERTINA RAW

- A.** PILLAR CAP UNIT  
(SECURE WITH FLEXLOCK ADHESIVE)
- B.** TRAVERTINA RAW PILLAR UNIT  
SECURE EACH ROW WITH FLEXLOCK ADHESIVE
- C.** EMBEDMENT 6" (150 mm) MIN.
- D.** 36" (917 mm), HEIGHT PER PALLET  
42" (1067 mm), MAXIMUM HEIGHT
- E.** GEOTEXTILE
- F.** COMPACTED GRANULAR BASE 6" (150mm)  
THICK MIN. THICKNESS ACCORDING TO  
PROJECT SPECIFIC CONDITIONS

For all possible combinations of pillars and caps, please refer to the correspondence table on page 140

### STEPS

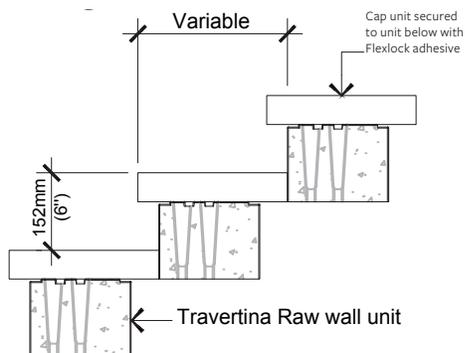

For all possible combinations of walls and caps, please refer to the correspondence table on page 140