

# LINEO™ DIMENSIONAL STONE

## CLASSIC

DUSK **NEW**

GRANITE BLEND



MIDNIGHT CHARCOAL

SAFARI **NEW**

### VISUAL APPEARANCE

Contemporary and sleek lines define Lineo™ Dimensional Stone with a linear multi-length plank look. Ideal for garden walls, pillars and other outdoor vertical elements, Lineo™ Dimensional Stone offers up modern design and exceptional flexibility.

### FINISH


Standard.

### PRODUCT SPECIFICATIONS

**XL RECTANGLE**

8 x 24 x 4"

200 x 600 x 100mm

**LARGE RECTANGLE**


8 x 20 x 4"

200 x 500 x 100mm

**RECTANGLE**


8 x 16 x 4"

200 x 400 x 100mm

**SMALL RECTANGLE**


8 x 12 x 4"

200 x 300 x 100mm

**CORNER/PILLAR UNIT**

8 x 16 x 4"

200 x 400 x 100mm

**U-GRIP™ BASE PAD**

14 x 19 x 2"


355 x 482 x 55mm

4 UNIT RANDOM BUNDLE



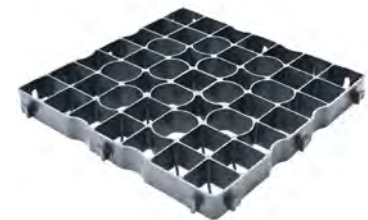
- Creates a revolutionary Reinforced Soil Structure (RSS) with high tensile and compressive strength to maximize the performance of pavement structures.
- Extremely permeable, long lasting, durable and environmentally friendly. Lightweight and easy to handle.
- Simple and quick installation.
- Allows for easy repairs / adjustments after installation.

See page 186-187 for more details.

**DRIVECEL30 LIGHT DUTY**

20 x 20 x 1.2"

500 x 500 x 30mm

**DRIVECEL50 HEAVY DUTY**

20 x 20 x 2"

500 x 500 x 50mm

\*Colour selection should be chosen from actual samples.

**TECHNICAL INFORMATION**

**ASTM C 1372 Standard Specifications for Dry-Cast Segmental Retaining Wall Units**

- Conforms to:
- C140 for Absorption and Compressive Strength > 3000 PSI
  - C1262 for Freeze Thaw Durability <1% mass loss
  - C1372 Overall dimensional variations permissible for width, height and length +/- 3.2mm

**Unilock standards exceed 6,000 PSI for Lineo™ Dimensional Stone products with:**

- 4% absorption avg.
  - 5% absorption max.
  - Dimensional Accuracy +/-2.00mm
- Test results available upon request*

**Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines**

**LEED INFORMATION**

**Materials & Resources: LEED V4:**

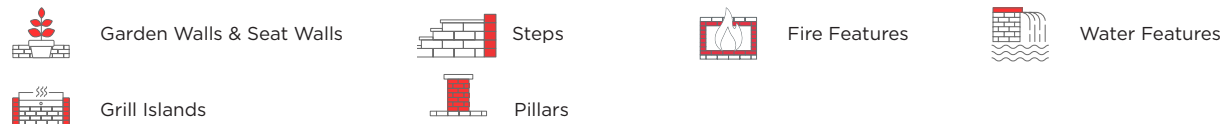
- Building Product Disclosure and Optimization  
 Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • **1 point**  
 Sourcing of Raw Materials - Leadership Extraction Practices • **1 point**  
 Material Ingredient Reporting - Material Ingredient Reporting • **1 point**  
 Material Ingredient Reporting - Material Ingredient Optimization • **1 point**  
 Environmental Product Declaration • **1 point**

**PRODUCT DATA**

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
<b>Gormley Manufacturing / Pillars Caps - Georgetown Manufacturing; U-Grip - Gormley Manufacturing</b>										
Random Wall Bundle:	29.93	-	89.06	-	63	-	3	-	43	2,738
XL Rectangle	7.97	0.66	23.71	1.98	12	1.51	-	-	-	-
Large Rectangle	6.65	0.55	19.78	1.65	12	1.81	-	-	-	-
Rectangle	9.31	0.44	27.72	1.32	21	2.25	-	-	-	-
Small Rectangle	6.00	0.33	17.86	0.99	18	3.00	-	-	-	-
Pillar Unit	39.84	0.66	79.20	1.32	60	1.51	-	-	41	2,435
Ledgestone Pillar Cap	-	-	-	-	5	-	-	-	302	1,510
U-Grip Base Pad	-	-	85.39	1.58	54	-	9	-	46	2,500

Notes: Product sold in full bundles on a refundable skid. Maximum height – 24” (under optimum conditions). All measurements are nominal. Spacing strips are shipped with random wall bundles to create even spacing between units. Free standing wall and is limited to not exceed 24” in height. For more information, samples or custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.

**APPLICATIONS**



For coping options, we recommend using Ledgestone™, Natural Stone, Universal Coping or Umbriano® Coping.

**RECOMMENDED ADHESIVE**

**Alliance Gator Block Bond XP**

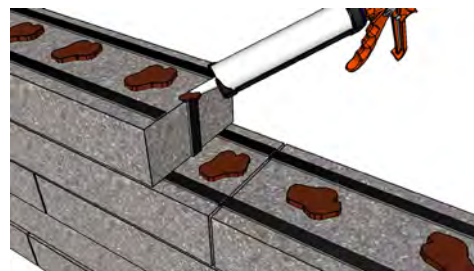
- | VOC Compliant
- | Low odour- safe indoors or out
- | Fast curing- provides permanent overnight bond
- | Suitable for use in hot and cold environments
- | Non-shrinking- does not crack
- | Strong and versatile

Coverage: For 1/4” Bead (approx)

10 oz		28 oz	
m	ft.	m	ft.
-9	-31	-26	-86



\* Spacers required



\* Spacers required